


ACTIVE Trainer

Self Contained. Space Saving

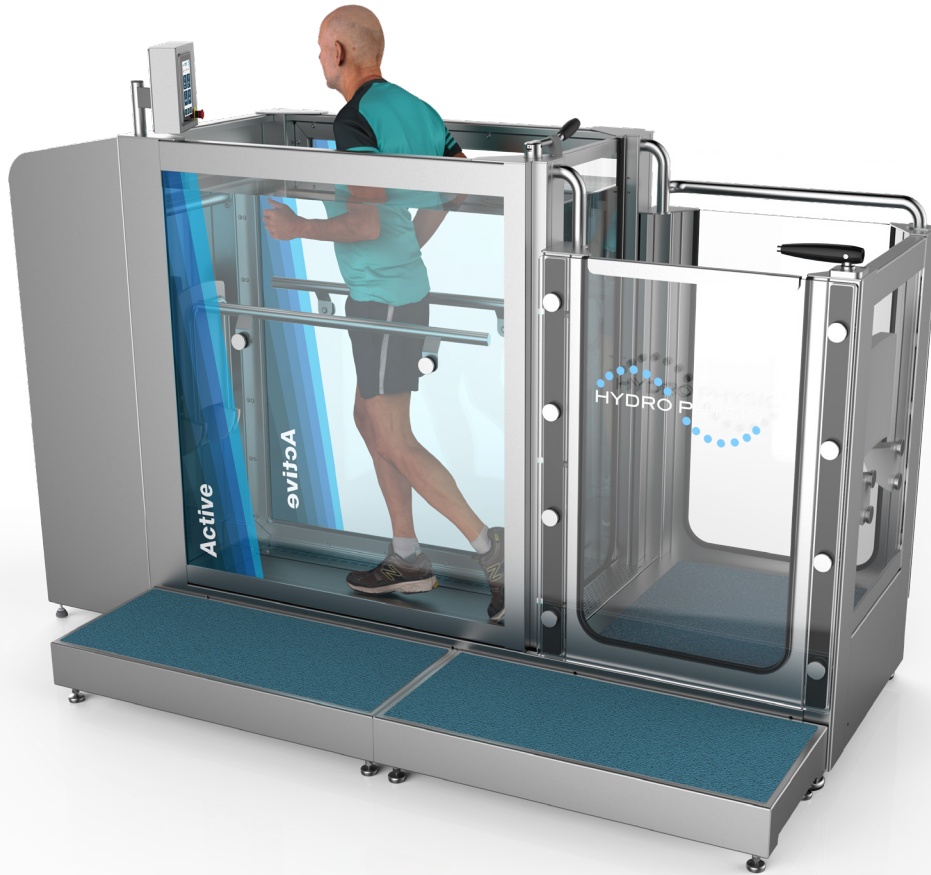

Platform coverings may vary from illustrated. Please check colour options when ordering.

The ACTIVE Trainer system includes a treadmill chamber, with integral plant equipment and water storage.

Minimum room sizes:



- Minimum ceiling height: 2.5m
- Minimum door height: 2m
- Minimum door width: 1m
- Minimum space required: 20m²
- Minimum floor loading: 1250kg/m²

Equipment Features

- Max Water Height
- Max Water Temp
- Speed Range
- Water Treatment
- UV & Cart Filter
- Touch Screen Controls
- Record Patient Notes
- Fold Down Seat (130kg)
- Self Contained

Additional Options

- Resistance Jets
- Decking Options
- Removable Handrails
- Heavy Duty Seat (200kg)

FEATURES

- [+] OUTWARD OPENING DOOR WITH PATENTED LATCH DEVICE
- [+] MEDICAL GRADE STAINLESS STEEL CONSTRUCTION
- [+] LARGE VIEWING PANELS FOR PATIENT MONITORING
- [+] COMMERCIAL CARTRIDGE FILTRATION SYSTEM
- [+] UV FILTRATION
- [+] CHEMICAL FEEDER
- [+] STRIDE LENGTH AND WATER DEPTH INDICATORS
- [+] TREADMILL SYSTEM MONITORING
- [+] 7" TOUCH SCREEN
- [+] FOLD DOWN SEAT (130kg capacity)
- [+] SELF CONTAINED, SPACE SAVING DESIGN
- [+] OPERATOR PLATFORMS

OPTIONS

- [+] RESISTANCE JETS
- [+] NON SLIP SURFACE COLOUR OPTIONS
- [+] ADDITIONAL HANDRAILS (removable)
- [+] HEAVY DUTY SEAT (200kg capacity)


TECHNICAL SPECIFICATION

Maximum load	200kg (440lbs) assuming 50% weight bearing in water
Maximum water depth	620 (25") - 1270mm (50")
Speed range	0.5 - 10kph (0.3 - 6.2mph)
Fill / empty times	Approx 3½ minutes to max depth
Temperature range	From ambient - 40°C (104°F)
Trainer dimensions (Excluding display)	L 2755mm (108") x W 880mm (35") x H 1630mm (64")
Complete system weight	
Dry	900kg (1984 lbs)
Full	2400kg (5291 lbs)
Capacity	1500 litres (330 gals, 396 US gals)
Max distance between treadmill and plant equipment	10m (394")
Power	400V 3 phase neutral & earth 50/60hz 40A per phase



+ 44 (0)1952 885112 Broseley, Telford,
lifestyle@HYDROPHYSIO.com Shropshire, TF12 5JA.
www.HYDROPHYSIO.com United Kingdom.

Over 1,000 HYDRO PHYSIO Systems Installed Worldwide



Intellectual Property:
EU Patent No. 1 850 825
US Patent No. 8 667 622

Designed & Manufactured In Great Britain

Sold through our International Distributor Network.

Call us to get help planning your project with site surveys, layout design and installation.