


CORE Trainer

The Foundation for Aquatic Therapy



Features

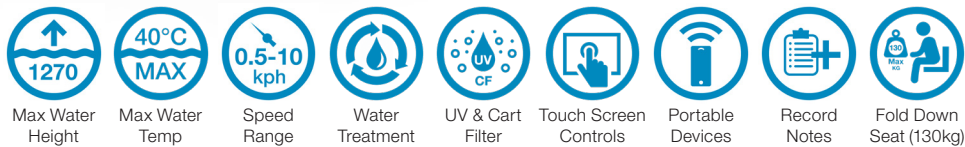


Options



The CORE Trainer system includes a treadmill chamber, plant equipment and a water storage tank (sited in separate plant room).

Installation requirements:

- Ceiling height: 2.5m
- Door height: 2m
- Door width: 1m
- Space required: 30m²
- Floor loading: 1250kg/m²

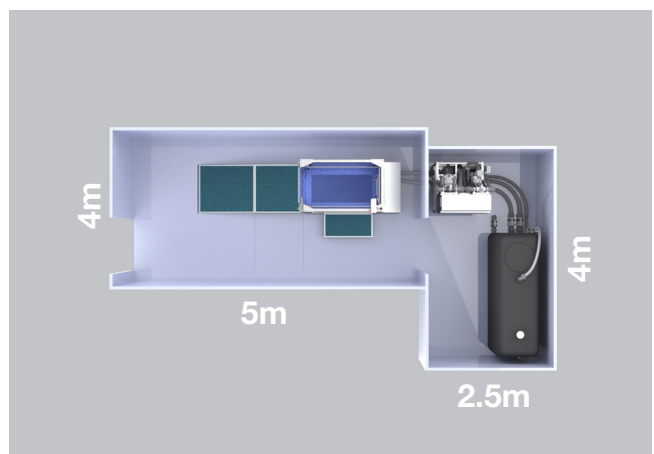

FEATURES

- [+] LARGE OBSERVATION WINDOWS
- [+] 7" TOUCH SCREEN
- [+] INTUITIVE CONTROLS
- [+] STAINLESS STEEL CONSTRUCTION
- [+] OUTWARD OPENING DOOR WITH PATENTED LATCH DEVICE
- [+] STRIDE LENGTH INDICATORS
- [+] FOLD DOWN SEATING (130kg capacity)
- [+] UV FILTRATION
- [+] CHEMICAL FEEDER
- [+] 360° MONITORING
- [+] COMMERCIAL CARTRIDGE FILTRATION SYSTEM

OPTIONS

- [+] ADDITIONAL HANDRAILS (Removable)
- [+] HEAVY DUTY FOLD DOWN SEATING (200kg capacity)
- [+] NON SLIP SURFACE COLOUR OPTIONS
- [+] SIDE PLATFORMS FORMAT
- [+] ACCESS RAMP

TECHNICAL SPECIFICATION

Maximum user load	250kg (550lbs) assuming 50% weight bearing in water
Treadmill speed range	0.5 - 10kph
Water depth range	0 - 1270mm (50")
Temperature range	From ambient - 40°C (104°F)
Trainer dimensions (excluding display)	L 1390mm (54.5") x W 860mm (34") x H 1630mm (64")
Complete system weight	Dry - 920kg (2030 lbs) Full - 2370kg (5225 lbs)
Capacity	1450 litres (319 UK gals, 383 US gals)
Max distance between treadmill & plant equipment	10m (394")
Fill/empty times	Approx 2½ minutes to max depth
Power	400V 3 phase neutral & earth 50/60hz 40A per phase

Intellectual Property:
EU Patent No. 1 850 825
US Patent No. 8 667 622

More than 1,000 HYDRO PHYSIO Systems Installed Worldwide

Sold through our International Distributor Network

Contact us on + 44 (0)1952 885112, to learn more about the CORE



Designed & Manufactured In Great Britain

lifestyle@HYDROPHYSIO.com
www.HYDROPHYSIO.com

HYDRO PHYSIO
Broseley, Telford,
Shropshire, TF12 5JA
United Kingdom

